

Type: MXPRC/S-4W

Phase Failure, Phase Sequence, Under and Over Voltage plus Time Delay


- ☐ 17.5mm DIN rail housing
- ☐ True R.M.S.
- ☐ Microprocessor based (self checking)
- ☐ Monitors own supply and detects if one or more phases exceed the set Under or Over Voltage trip levels
- ☐ Measures phase to neutral voltages
- ☐ Detects incorrect phase sequence, phase loss and neutral loss
- ☐ Adjustments for under and over voltage trip level
- ☐ Adjustment for time delay (from under or over voltage condition)
- ☐ 1 x SPDT relay output 8A
- ☐ Intelligent LED indication for supply and relay status

Dims:
to DIN 43880
W. 17.5mm



Terminal Protection to IP20

FUNCTION DIAGRAM

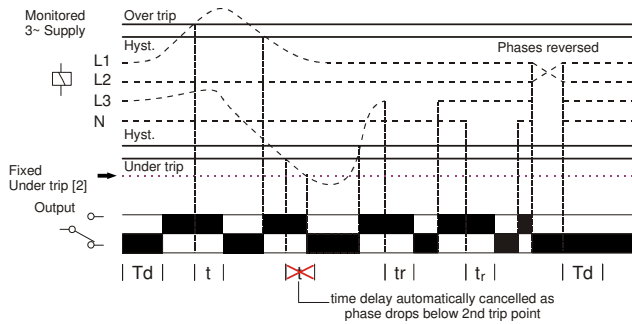

INSTALLATION AND SETTING



Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.
- Connect the unit as required. The Connection Diagram below shows a typical installation, whereby the supply to a load is being monitored by the Phase monitoring relay. If a fault should occur (i.e. fuse blowing), the relay will de-energise and assuming control of the external Contactor, de-energise the Contactor as well.

Applying power.

- Set the "Over %" adjustment to maximum and the "Under %" adjustment to minimum. Set the "Delay (t)" to minimum.
- Apply power and the green "Power supply" and red "Relay" LED's will illuminate, the relay will energise and contacts 15 and 18 will close. Refer to the troubleshooting table if the unit fails to operate correctly.

Setting the unit.

- Set the "Over %" and the "Under %" adjustments to give the required monitoring range.
- If large supply variations are anticipated, the adjustments should be set further from the nominal voltage.
- Set the "Delay (t)" adjustment as required. (Note that the delay is only effective should the supply increase above or drop below the set trip levels. However, if during an under voltage condition the supply drops below the 2nd under voltage trip level, any set time delay is automatically cancelled and the relay de-energises).


Note: If the supply voltage increases above the maximum "Over %" trip setting by approx. 5% or more, the relay will de-energise immediately.

Troubleshooting.


The table below shows the status of the unit during a fault condition.

Supply fault	Green LED	Red LED	Relay
Phase or neutral missing	On	Off	De-energised
Phases reversed (no delay)	Flashing	Off	De-energised
Under or Over Voltage condition (during timing)	On	Flashing	Energised for set delay (t)
Under or Over Voltage condition (after timing)	On	Off	De-energised
Phase below 70% of Un (fixed under trip level [2])	On	Off	De-energised

CONNECTION DIAGRAM

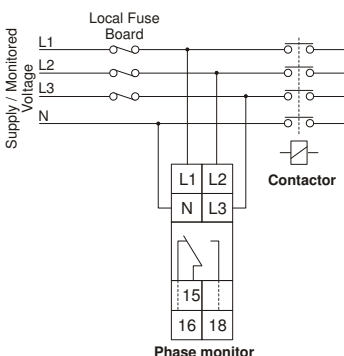

SETTINGS

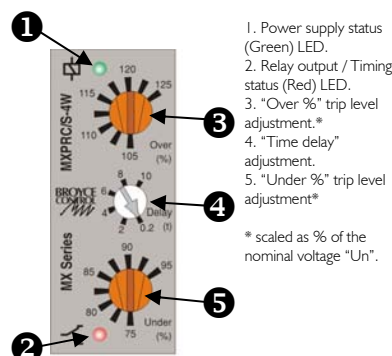

TECHNICAL SPECIFICATION

Supply / monitoring voltage Un* (L1, L2, L3, N): 120, 127, 220^v, 230^v, 240V^v AC
 Frequency range: 48 - 63Hz
 Supply variation: 70 - 130% of Un
 Isolation: Over voltage cat. III
 Rated impulse withstand voltage: 4kV^v (1.2 / 50μs) IEC 60664
 Power consumption: 6VA max.

*Please state Supply / monitoring voltage when ordering

Trip levels:

Under [2]:	70% of Un (fixed) ±2%		
Under:	75 - 95% of Un		
Over:	105 - 125% of Un		

Measuring ranges:

	Under [2]	Under	Over
120V:	84V	90 - 114V	126 - 150V
127V:	89V	95 - 121V	133 - 159V
220V:	154V	165 - 209V	231 - 275V
230V:	161V	173 - 218V	241 - 288V
240V:	168V	180 - 228V	252 - 300V

Hysteresis: ≈ 2% of trip level (factory set)
 Setting accuracy: ± 3%
 Repeat accuracy: ± 0.5% @ constant conditions
 Immunity from micro power cuts: < 50mS
 Response time: ≈ 50mS
 Time delay (t): 0.2 - 10 sec (± 5%)
 Note: actual delay (t) = adjustable delay + response time

Delay from Phase/neutral loss (tr): ≈ 150mS (worst case = tr x 2)
 Power on delay (Td): ≈ 1sec. (worst case = Td x 2)

Ambient temp: -20 to +60°C
 Relative humidity: +95%

Output (15, 16, 18): SPDT relay
 Output rating: AC1 250V 8A (2000VA)
 AC15 250V 5A (no), 3A (nc)
 DC1 25V 8A (200W)

Electrical life: ≥ 150,000 ops at rated load
 Dielectric voltage: 2kV AC (rms) IEC 60947-1
 Rated impulse withstand voltage: 4kV (1.2 / 50μs) IEC 60664

Housing: Orange flame retardant UL94 V0
 Weight: ≈ 75g
 Mounting option: On to 35mm symmetric DIN rail to BS5584:1978 (EN50 002, DIN 46277-3) Or direct surface mounting via 2 x M3.5 or 4BA screws using the black clips provided on the rear of the unit.

Terminal conductor size: ≤ 2 x 2.5mm² solid or stranded

Approvals: Conforms to IEC, CE and RoHS Compliant.

EMC: Immunity: EN/IEC 61000-6-2 (EN/IEC 61000-4-3 15V/m 80MHz - 2.7GHz)
 Emissions: EN/IEC 61000-6-4

Note:

The "Supply / monitoring voltage Un" refers to the phase to neutral nominal voltage for the product and voltage variants available. To convert these voltages to a phase to phase voltage, multiply by 1.732.

MOUNTING DETAILS

