

Type: FWD8 & FWD11

Sockets

- ❑ 8-pin (FWD8) or 11-pin (FWD11) types available
- ❑ 35mm DIN Rail or Surface Mounting
- ❑ Self Rising Washers
- ❑ 2 x 2.5mm cable acceptance
- ❑ Suitable for any 8 or 11-pin based Products or Relays



Dims:
H. 24mm
W. 36mm
D. 83mm


• INSTALLATION NOTE



Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.

• PINNING DETAILS

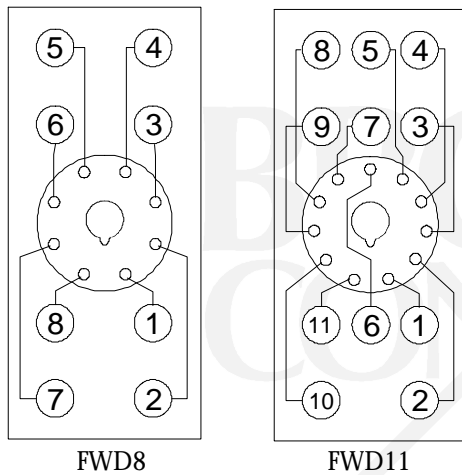

• TECHNICAL SPECIFICATION

Voltage rating: 300V AC
Current rating: 10A

Ambient temp: -45 to +60°C

Material: Grey, UL94 V0
Weight: ~ 60g

Mounting option:
1. On to 35mm symmetric DIN rail to BS5584:1978 (EN50 002, DIN 46277-3)
2. Surface mounting using the two fixing holes provided. Fixing centres are 29.5mm, Ø 3.5mm

Approvals: CE Compliant.

• Accessories

RR101 – Retaining Clip to suit B152E/WT & B153E/WT relays.
RTSB – Retaining Clip to suit B-Series Timers/Monitoring relays.