

Type: FWD14

14-pin Socket

- ❑ Suited primarily for B154E Relay
- ❑ 35mm DIN Rail or Surface Mounting
- ❑ Self Rising Washers
- ❑ 2 x 2.5mm cable acceptance



Dims:
H. 28mm
W. 46mm
D. 92mm


• INSTALLATION NOTE



Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.

• PINNING DETAILS

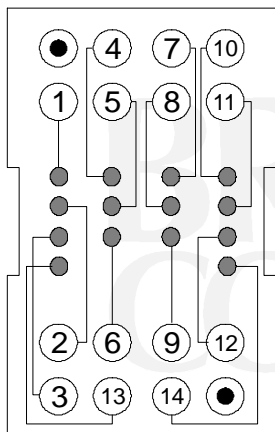

• TECHNICAL SPECIFICATION

Voltage rating: 250V AC
Current rating: 10A

Ambient temp: -20 to +60°C

Material: Flame Retardant, UL94 V1

Weight:

Mounting option: 1. On to 35mm symmetric DIN rail to BS5584:1978 (EN50 002, DIN 46277-3)

2. Surface mounting using the two fixing holes provided. Fixing centres are 81.5 x 35mm, Ø 3.5mm

Approvals: CE Compliant.

• Accessories

RR114 - Retaining Clip to suit B154E relay.