


# Type: PFZ4

## 14-pin Socket

- ❑ Suited primarily for BC4/WT Relay
- ❑ 35mm DIN Rail or Surface Mounting
- ❑ Self Rising Washers
- ❑ Adjustable Retaining Clip facility 3 heights
- ❑ Indicator & Protection module facility
- ❑ Removal I.D. tab



Dims:  
H. 28mm  
W. 30mm  
D. 67mm


### • INSTALLATION NOTE



Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.

### • PINNING DETAILS

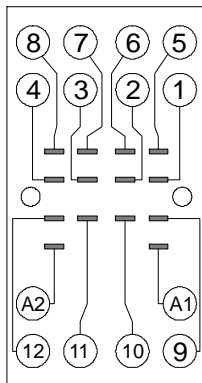

### • TECHNICAL SPECIFICATION

Voltage rating: 300V AC  
Current rating: 7A

Ambient temp: -40 to +60°C

Material: Black, Flame Retardant, UL94 V1

Weight: = 48g


Mounting option:  
1. On to 35mm symmetric DIN rail to BS5584:1978 (EN50 002, DIN 46277-3)  
2. Surface mounting using the two fixing holes provided. Fixing centres are 24.5mm,  $\varnothing$  3.2mm

Approvals: UL & CSA.  
CE Compliant.

#### • Accessories

RTC4 – Retaining Clip to suit BC4/WT relay.

#### Plug-In Modules:



DS-M62 – 24V AC/DC LED Module  
DS-M92 – 230V AC LED Module

DS-M52 – 24/48V AC “RC” Module  
DS-M52A – 115/230V AC “RC” Module

DS-M22 – “Back EMF” Diode Module

DS-RL – Relay Retaining Ejection Lever